

► CAUTION

- Do not open or strike this equipment. Sensitive electronics inside are vulnerable to excessive shock.
- Do not install the equipment near any naked flames or heat sources. Excessive heat could damage this unit.
- Do not cover cloth or to install this unit in poorly ventilated places. This may lead to overheating.
- Do not continue to operate if there appears to be fault.
If the unit ceases to function, contact qualified service personnel for help.
- Do not touch the power connection with wet hands. Risk of short circuit or electric shock.
- Do not damage the power cord or leave it under pressure. Risk of fire or shock circuit.



FEATURE

1/2.7" inch, 5 Megapixel CMOS

HIGH RESOLUTION 4MP(1440P)/5MP(1920P)

BUILT-IN OSD KEY AT REAR PANEL

D-WDR, 3D-DNR

DIMENSION : 19Φ × 72.5mm


Minimum Illumination : 0.5Lux (F:1.2)

3.6mm Fixed Lens

Power Source : DC12V (± 30%)

Standard 500mm, BNC/DC Jack

Weather proof, IP66

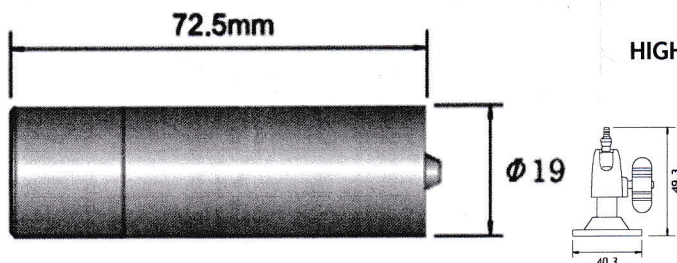

SPECIFICATION

Device	1/2.7" inch, 5 Megapixel CMOS	
Active Pixels	2688(H) × 1944(V)	
Scanning System	Progressive	
Resolution	AHD, TVI 4MP_1440P / 5MP_1920P	
	CVBS_950TVL(4MP Setting)	
S/N	More than 50dB	
Video Output	AHD, TVI 4M_(16:9) / CVBS_1280H	
	Option_AHD 5M_(4:3)	
Min. Illumination	COLOR : 0.5Lux / BW : 0.1Lux	
LENS	Mega f=3.6mm Fixed Lens	
White Balance	ATW/ AWC-SET	
Exposure	DC / MANUAL	
Shutter Sped	AUTO / FLK	
	NTSC : 1/30 ~1/50.000sec / PAL : 1/25 ~1/50.000sec	
SENS-UP	AUTO(x6) / x2.x4.x6.x8.x10.x15.x20.x25.x30	
Backlight Compensation	OFF/BLC	
Day & Night	AUTO / COLOR / BW / EXT	
Motion Detection	OFF / ON	
2D-3DNR	OFF / LOW / MIDDEL / HIGH	
Digital Effect	OFF / MIRROR / V-FLIP / ROTATE	
RT/NRT	ON / OFF	
Image Enhancement	D-WDR	
Communication	Coaxial Comm..	
OSD	Built-in (5 direction Key)	
LANGUAGE	ENG/CHN1/CHN2/GER/FRA/ITA/SPA/POL/RUS/POR /NED/TUR/JPN	
POWER	Power Input	DC+12V (100mA) ± 30%
	Power Consumption	1.2W
Operation Temperature	-10°C - +50°C	
Storage Temperature	-20°C - +60°C	
Dimension	19Φ × 72.5mm	