


CCIQIII MINI CAMERA MANUAL

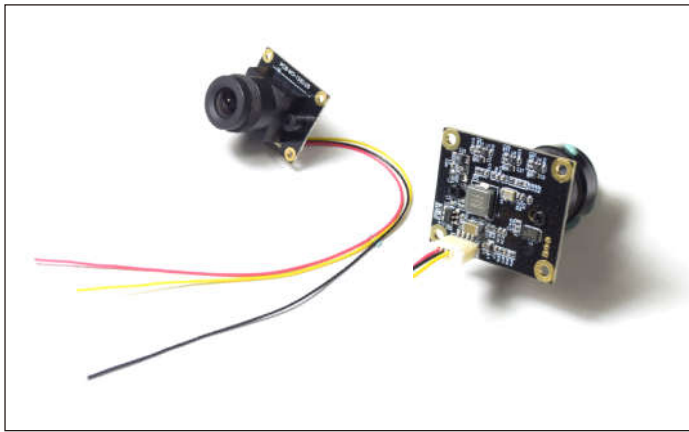

► Specification

Image sensor	1/3" CMOS CCIQ II color camera
Video system	NTSC / PAL
Number of effective pixels	960 x 576
Scanning system	2:1 interlace
Synchronization	internal
TV lines	710 (NTSC) , 740 (PAL) TV line
S/N Ratio	43.3 [dB]
Minimum Illumination	0.05Lux / F1.2
Max. Frame Rate	60 field/sec (NTSC) ,50 field/sec (PAL)
Sensitivity	10.9 [V/Lux.sec]
Horizontal Sync Frequency	15.734kHz(NTSC), 15.625kHz(PAL)
Vertical Sync Frequency	60Hz(NTSC), 50Hz(PAL)
Gamma Consumption	0.45
Video Output	1Vp-p , 75ohms Composite
Built-in Lens	3.6mm/F2.0(M12xP0.5)
Storage Temperature	-30 to 60 Degree C
Working Temperature	-10 to 45 Degree C
Power Supply	Camera:DC 5~12V
Power Current	80mA-Max
Dimensions (mm)	22 x 26mm

► Instruction Drawing & Description

